

MSC-512S, MSC-524S, MSC-523S

HIGH QUALITY CCTV CAMERA




- FEATURES -




- 1/3" SONY DSP HI-RESOLUTION SUPER HAD CCD
- 550TV Lines Horizontal Resolution
- Excellent Low Light Sensitivity of 0.3, 0.002 Lux/F1.2 (50 IRE)
- DC & Video Controlled Varifocal Lens
- OSD menu control by push button
- Strong Compatibility with Various Lens Type




- DIMENSION -

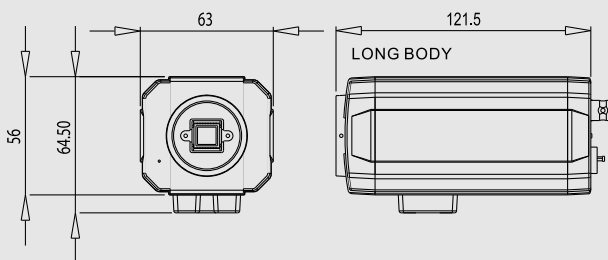


- BACK VIEW -



DC12V



DC12V / AC24V



AC230V

- SPECIFICATION -

Model	MSC-512S, MSC-524S, MSC-523S	
Signal Format	NTSC	PAL
Input Voltage	DC 12V, DC12V / AC24V, AC 230V	
Power Consumption	6.5W Max / 30mA	
Size	1/3" SONY Hi-Resolution Super HAD CCD	
Total / Effective Pixels	811(H) x 508(V) / 768(H) x 494(V)	
Scanning System	2:1 Interlace	
Synchronization	Internal	
Frequency	H : 15.734 Khz / V : 59.94 Hz	
Resolution	520 TV Lines (Min.)	
Min. Illumination	0.3 Lux/F1.2 (50 IRE) ; Color / 0.002 Lux/F1.2 (50 IRE) ; Sens-up	
S/N (Y signal)	50 dB (AGC Off, Weight On) Confirm the E/S step	
Video Output	CVBS : 1.0Vp-p / 75 (Dual Output)	
IRIS Control	DC / Video / Manual	
Camera Title	OFF / ON (Displayed 15 characters)	
Day & Night	ON, Auto	
Gain Control	Low, Middle, High, Off Selectable	
White Balance	ATW/AWC/Manual (1800°K ~ 10,500°K)	
Back Light Compensation	Low / Middle / High / Off Selectable	
Electronic shutter	ESC(X128 ~ 1/60 ~ 1/20000sec)	
O.S.D	Built-in	
Motion Detection	On / Off (4 Programmable Zone per Screen)	
DNR	Low, Middle, High, Off	
Privacy Function	On/Off (4 Programmable Zone per Screen)	
Operating	Temperature -10°C to +50°C / Humidity 20% to 80% RH	
Storage	Temperature -20°C to +60°C / Humidity 20% to 90% RH	
Weight	594g	